


Premium Custom Knitted Socks

Socks with custom knitted motive.

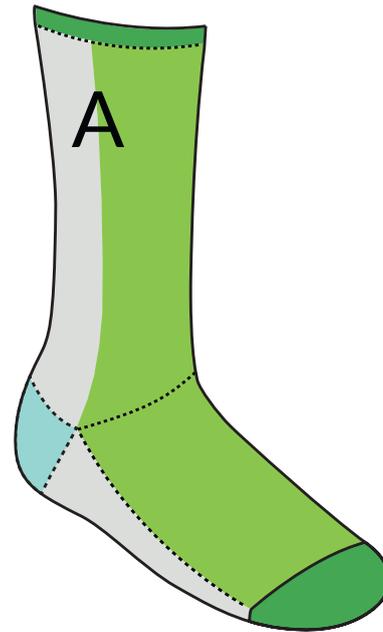

— Data format = Trimmed format

● Data format = Trimmed format 75 x 191 mm
The print data will be tailored to this format.

Guidelines for Creating Production Data

Pure Vector Data: Your layout must be entirely vector-based. Pixel-based elements (such as photos or JPEG images) cannot be processed for production.

Fonts to Outlines: Please convert all typography completely into curves or paths/outlines before exporting.

No Graphic Effects: Completely avoid transparencies, color gradients, halftones, or rasterization. The design must consist exclusively of solid color areas.

Strict Color Limitations: Please follow the attached yarn color chart exactly for your color choices. The design is restricted to a maximum of six Pantone C spot colors from this overview. Every shade must be set at 100% opacity in its respective color channel.

No Overlapping: Overlapping paths or objects cannot be executed using this knitting technique. All graphic elements must be created „flat“ (meaning exactly adjacent to each other or knocked out/punched out).

Clearance at Heel and Toe: The areas for the heel and the toe must be set up as solid, single-color blocks. Do not place any texts, logos, or patterns in these areas.

Minimum Typography Size: The x-height (height of lowercase letters) must be at least 5 mm (approx. 16 pt). We recommend highly legible, sans-serif typefaces such as Arial.

Minimum Line Weight: Outlines and lines require a continuous minimum thickness of 1 mm (approx. 3 pt) to ensure they can be knitted cleanly.

Important points for creating print data

Resolution	<p>When producing your printed matter, make sure that a resolution of 300 dpi or ppi is set. This guarantees a detailed and high quality resolution. dpi stands for the abbreviation "dots per inch". It describes point density in image reproduction and is a measure of the level of detail, i.e. the resolution of an image or graphic.</p>
Color application	<ol style="list-style-type: none">1. Color applications of less than 10% are not recommended for print data, as they are barely visible in the print.2. To create a pure deep black, please set black to 100% in the color palette.3. Please create fine lines (e.g. 0.25 pt) in pure deep black (100%)
Line width	<p>For positive lines (dark line on a light background) you should use a thickness of at least 0.25 pt (0.09 mm). For negative lines (light line on a dark background), please use a line width of at least 0.5 pt (0.18 mm).</p>
Create file in CMYK mode (4-colored) or grey scales (2-colored)	<p>CMYK is the abbreviation for the 4 color components cyan, magenta, yellow and key (black). These serve as the basis for all modern printing processes for creating colored images. When creating print files, it is imperative that they are created in CMYK mode. The RGB mode is only suitable for display on the monitor and is not suitable for printing, as the colors are otherwise displayed differently in the print. ISO Coated v2 300% (ECI)</p>
The following color profiles may be used	<p>Free to download from www.eci.org</p>
Save print file either as PDF / X-3: 2002, tif / tiff or jpg / jpeg	<ul style="list-style-type: none">● PDF / X-3: 2002 Requirements:<ul style="list-style-type: none">- PDF version must be 1.3- Transparencies are not allowed- Comments and form fields are not allowed- Encryption (e.g. password protection) is not allowed- OPI comments are not allowed- Transfer curves are not allowed- An output intent must be specified- Layers are not allowed- All fonts must be converted to outlines● tif / tiff requirements:<ul style="list-style-type: none">- Reduce to the background layer- Alpha channels are not allowed- Clipping paths are not allowed- Save without compression, interleaved pixel arrangement● jpg / jpeg requirements:<ul style="list-style-type: none">- Use only standard JPG format (no JPG 2000 or similar)- Save with maximum quality and baseline (default)